


# Datasheet

## 6 Lock, 9mm Shackle Nylon Safety Lockout

RS Stock number [221-3416](#)

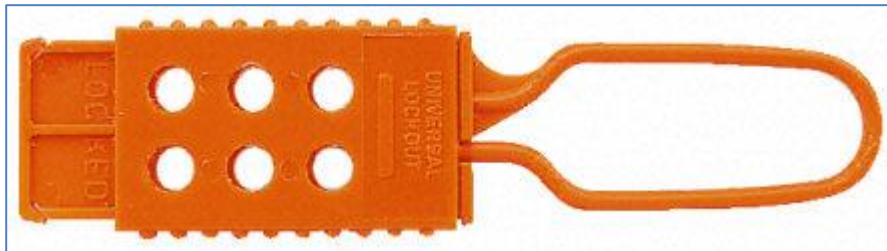

### Description:

- Isolates pneumatic energy without the expense and inconvenience of installing in-line lockout valves
- Device is applied to the male fitting, isolating equipment from all compressed air sources
- Hole in center of device allows for permanent storage on an air hose and a loop on the side can be used to hang the hose and lockout device

### Material:

- Body: Glass-filled Nylon
- Colour: Red (PMS 1805C)

Chemical	°C	Chemical	°C
Acetone	25	Petroleum	25
Acetone	60	Turpentine oil	25
Chlorine, chlorine water	25	Turpentine substitute (white spirit)	25
Fuel, engine: Gasoline (normal & premium grade)	85	Trichloroethane 1,1,1	45
Lubrication oil: gear oil	< 120	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120
Fuel, engine: M15 mixture (15% methanol)	70	Water (including seawater)	25
Methanol	25	Water (including seawater), chlorinated (<0,5 mg/l)	80

### Temperature Range

- Glass-filled Nylon: -20° to 120°C (0° to 250°F)

### Chemical Resistance

All approved chemicals listed are based on the manufactures specified chemical resistance chart for plastic material only.

A	-	0.83" [21mm]
B	-	0.31" [7.84mm]
C	-	0.42" [10.58mm]
D	-	0.33" [8.45mm]
E	-	0.46" [11.80mm]
F	-	0.80" [20.20mm]

